

THE MOST UNIQUE AND RELIABLE RESOURCE FOR TODAY'S ELECTRICAL CONTRACTOR

THE ELECTRIC CURRENT

Klein Tools'® Tone & Probe Test and Trace Kit Offers Simple Solution for Multiple Worksite Needs



First there was 4 square...
and now the **REVOLUTIONARY 5 Square® Box!!**

You've struggled with 4 Square boxes for years - you know how small, cramped and time consuming they are. Finally, there is a solution that allows you the space you have always needed.

The **5 Square® Boxes** (5" x 5" x 2-7/8") provide up to 88 in³ of interior volume which more than doubles that of most existing boxes on the market.

Create a robust and unrivaled infrastructure for the life of your facility with the **5 Square® Products!**

Fire Signal



- TWICE THE VOLUME AS MOST BOXES
- SAVE LABOR...INCREASE PROFITS
- ELIMINATES TROUBLESHOOTING TIME AND COST
- FULLY UPGRADEABLE SYSTEM
- SPECIFIED BY ENGINEERING FIRMS, HOSPITALS, UNIVERSITIES & GOVERNMENT AGENCIES
- AVAILABLE IN ZINC OR RED


Telecommunications



- INTEGRAL CABLE MANAGEMENT
- SAVE LABOR...INCREASE PROFITS
- FACILITATES MIN. BEND RADIUS REQUIREMENTS
- SUPPORTS CURRENT AND EVOLVING SYSTEMS
- SUPPORTS PoE PLUS
- SPECIFIED BY ENGINEERING FIRMS, HOSPITALS, UNIVERSITIES & GOVERNMENT AGENCIES

The Bright Idea S2 LED Bulb

is the LED solution you've been waiting for

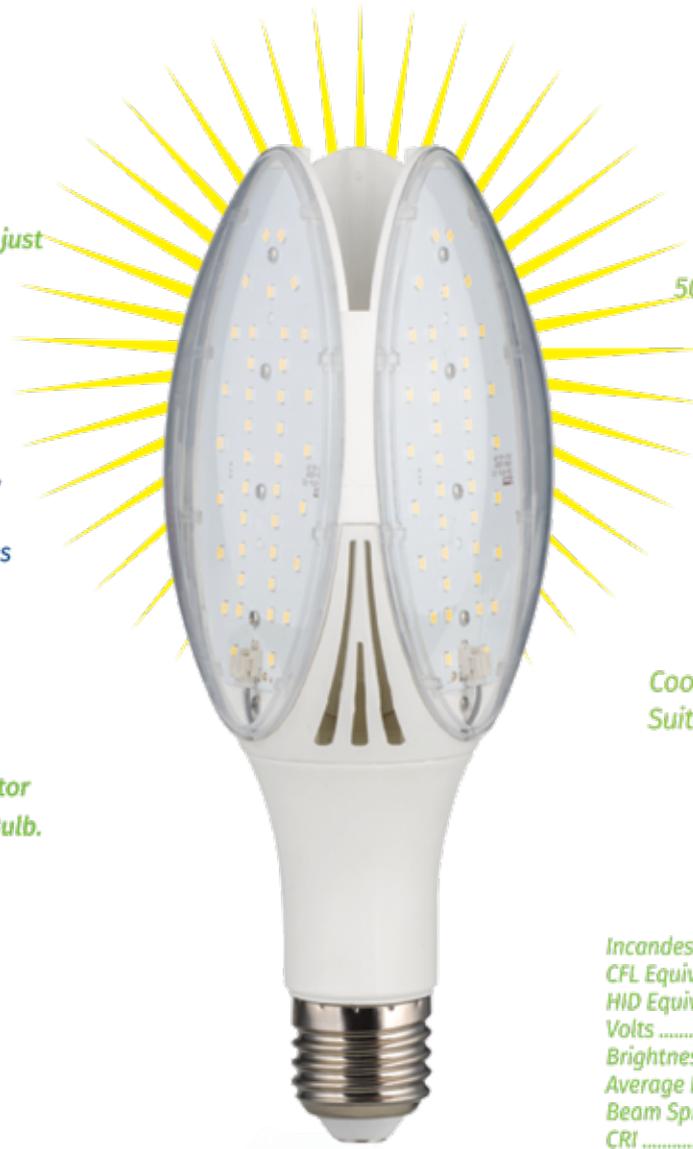

Let's be real. A light bulb isn't just a light bulb...

Replace old HID lamps with the new LED S2

From public safety to maintenance needs, this bright, flexible and inexpensive LED Solution reduces headaches across the board.

Simply source the latest in outdoor lighting technology from the best lighting source. And, the most trusted distributor of the Brex Lighting® S2 LED Bulb.

Kelvin Options

3000K

4000K

5000K

And more to come

Longevity + Output

50,000 Hours / 4,200 Lumens

Compatibility

Shape + Size of Traditional HID Lamps

Cost + Power Usage

Half the Cost and Energy Use of Typical HID Lamps

Heat

Coollest Operating Temperatures Suitable for Enclosed Luminaries

Support

5-Year Warranty

<i>Incandescent Equivalent Wattage</i>	<i>.... 300</i>
<i>CFL Equivalent Wattage</i>	<i>..... 85</i>
<i>HID Equivalent Wattage</i>	<i>..... 100</i>
<i>Volts</i>	<i>..... 120-277</i>
<i>Brightness Lumens</i>	<i>..... 4200</i>
<i>Average Rated Hours</i>	<i>..... 50,000</i>
<i>Beam Spread</i>	<i>..... 330°</i>
<i>CRI</i>	<i>..... >80</i>

BREX
LIGHTING
LIGHTING SOLUTIONS. SIMPLIFIED

32W



877-BREX-LED

www.BREXLIGHTING.com

PG 4 Klein Tools'® Tone & Probe Test and Trace Kit Offers Simple Solution for Multiple Worksite Needs

PG 8 Advances in MMW Isolator Design Launch Manufacturers into Stratospheric Operating Frequencies

PG 16 Ad Index



Pg 4

Vol. 20 Issue 2

PRESIDENT

Glen Hobson
205-441-5591
glen@tipsmag.net

PUBLISHER

Bart Beason
205-699-5495
bart@theelectriccurrent.com

ADMINISTRATIVE DIRECTOR

Steven Hobson
steven@tipsmag.net


EDITOR

Brandon Greenhill
brandon@cjspublishing.com

CREATIVE/ WEB DIRECTOR

Jacklyn Greenhill
jacklyn@cjspublishing.com


Get Cool!



Extend transformer life!

Increase transformer capacity up to 166%!

- expert technical assistance
- low sound levels
- energy-efficient motors
- large inventory
- one-piece cast aluminum blades
- galvanized or stainless steel guards



p.o. box 187 germantown, wisconsin 53022

262.255.2310

www.krenzvent.com

P.O. Box 1568 • Pelham, AL 35124
Phone: 205-441-5591 • Fax: 205-624-2181
www.theelectriccurrent.com
info@theelectriccurrent.com

The Electric Current™ is published eight times a year on a monthly basis by CJS Media. *The Electric Current™* is distributed free to qualified subscribers. Non-qualified subscription rates are \$57.00 per year in the U.S. and Canada and \$84.00 per year for foreign subscribers (surface mail). U.S. Postage paid at Birmingham, Alabama and additional mailing offices.

The Electric Current™ is distributed to qualified owners and managers in the electrical industry. Publisher is not liable for all content (including editorial and illustrations provided by advertisers) of advertisements published and does not accept responsibility for any claims made against the publisher. It is the advertiser's or agency's responsibility to obtain appropriate releases on any item or individuals pictured in an advertisement. Reproduction of this magazine in whole or in part is prohibited without prior written permission from the publisher.




POSTMASTER: Send address changes to
CJS Media • P.O. Box 1568
Pelham, AL 35124
PRINTED IN THE USA



BRANDON[®]

I N D U S T R I E S

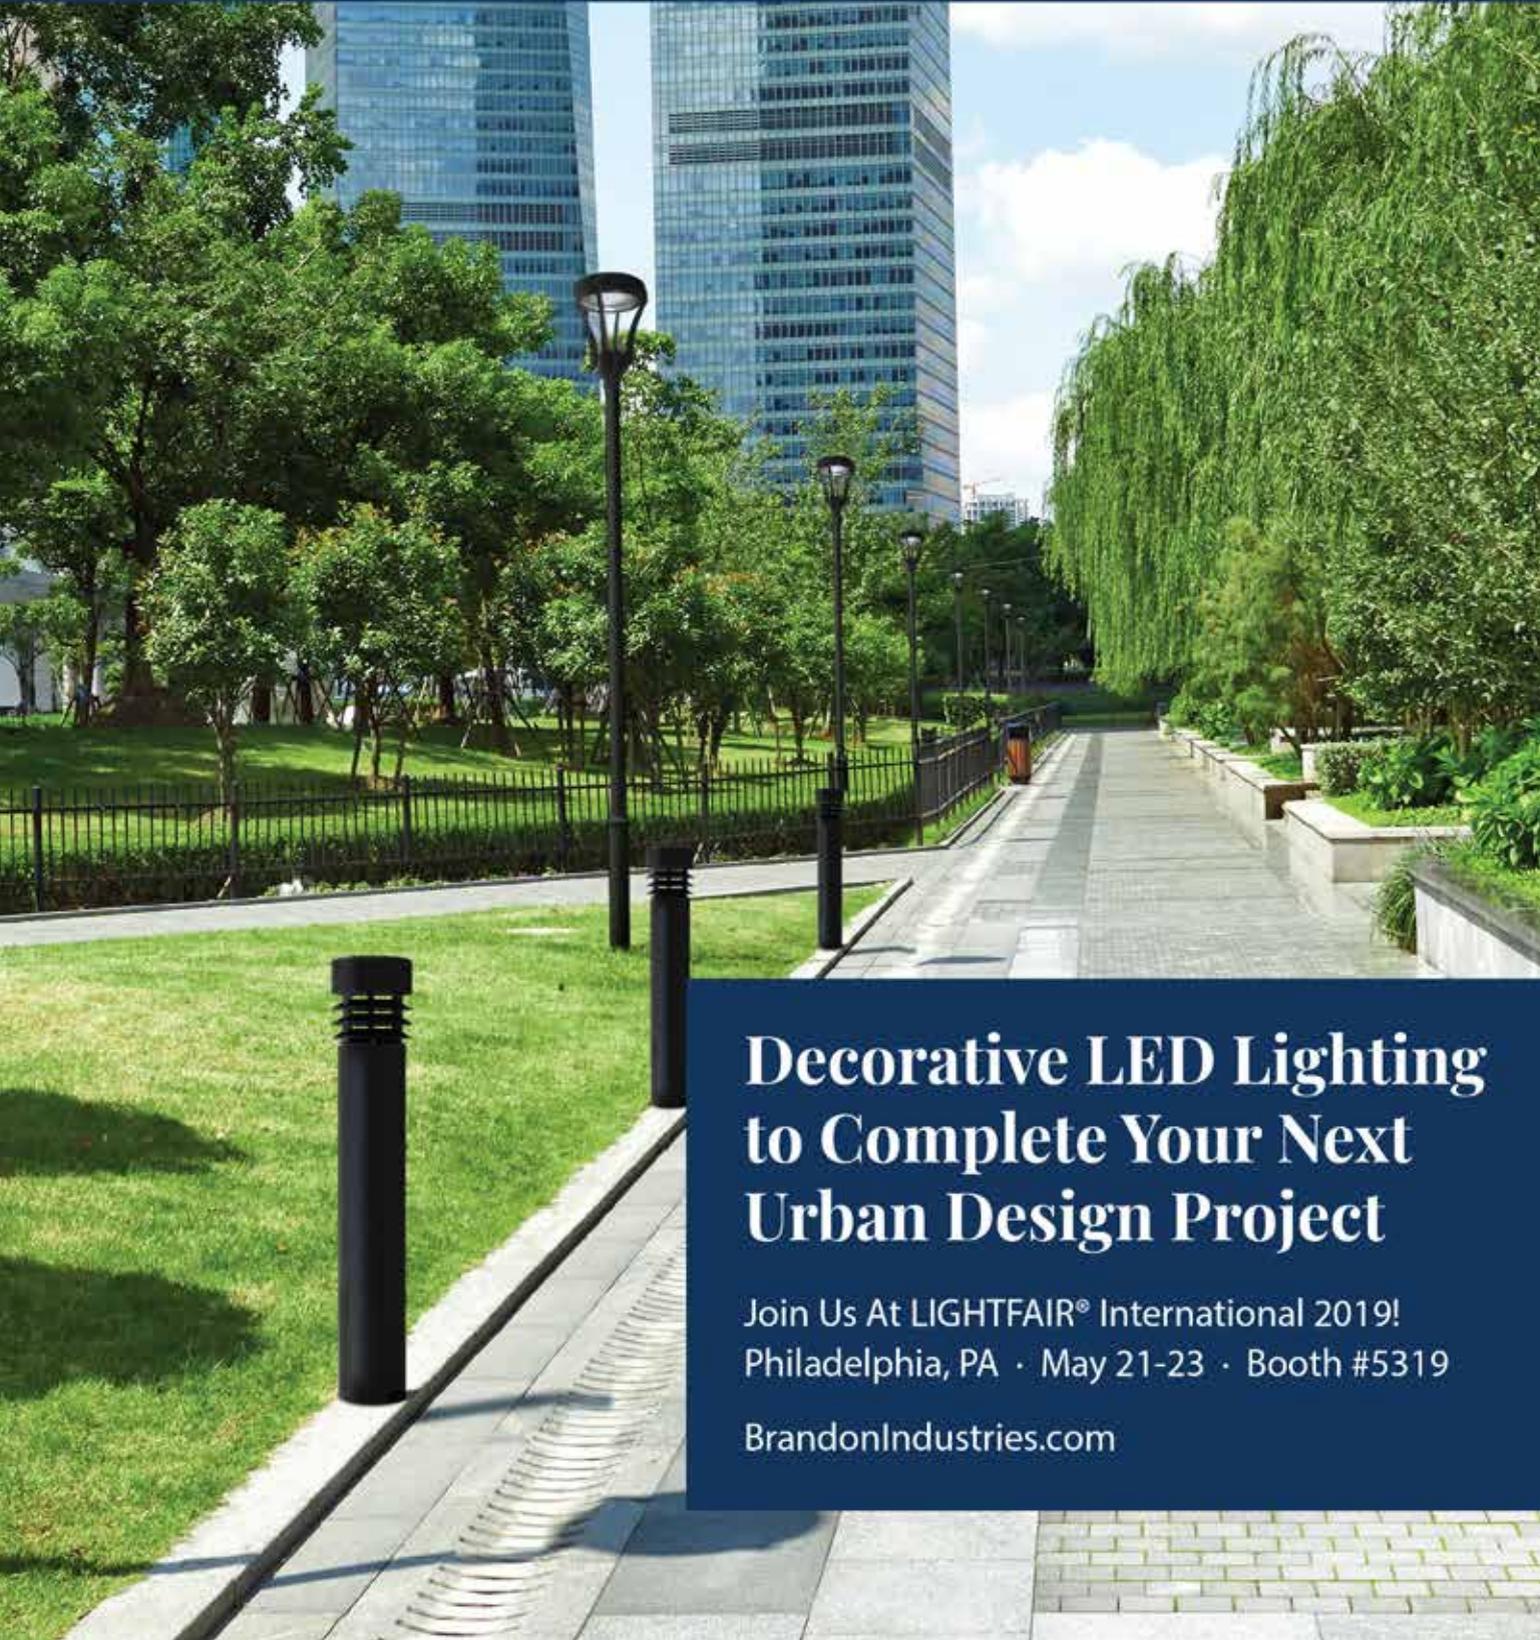

Decorative LED Lighting to Complete Your Next Urban Design Project

Join Us At LIGHTFAIR[®] International 2019!
Philadelphia, PA · May 21-23 · Booth #5319

BrandonIndustries.com





Klein Tools'® Tone & Probe Test and Trace Kit Offers Simple Solution for Multiple Worksite Needs

Klein Tools, for professionals since 1857, introduces the VDV500-705 Tone & Probe Test and Trace Kit, designed to give users an opening price point solution for simple toning and tracing as well as wire map testing of non-energized wire.

Tone & Probe Test and Trace Kit (Cat. No. VDV500-705)

- Easy-to-use tone generator traces wire when used with the included probe
- Responsive probe with durable, non-metallic, conductive tip
- Alligator clips for unterminated wires
- RJ45 to RJ45 test cable included
- Toner and probe together perform pin to pin wire map test on RJ45 terminated cables
- Work light on probe tip for use in dark spaces
- Adjustable volume control dial
- Headphone jack for noisy environments (headphones not included)
- Replacement test cables available (Cat. No. VDV770-855)



"In creating this kit, we wanted to provide a simple-to-use device that was also multi-functional," says Karen Alpan, product manager with Klein Tools. "This kit functions not only as a tone generator and wire tracing probe for non-active wire runs, but also performs pin-to-pin wire mapping testing."

For more information, visit www.kleintools.com/new-products or search for #NewKleins on social media.

About Klein Tools

Since 1857 Klein Tools, a family-owned and operated company, has been designing, developing and manufacturing premium-quality, professional-grade hand tools. The majority of Klein tools are manufactured in plants throughout the United States and are the No. 1 choice among professional electricians and other tradespeople. For more information, visit www.kleintools.com. Klein is a registered trademark of Klein Tools, Inc.

www.kleintools.com •

DABMAR LIGHTING

RGBW LIGHTING



LV325
3 x 4W



LV235-LED
4W

RGBW MR16 LAMP
4 Watt - 12V



LV342-LED
4W



LV314-LED
4W



DW4751-LED-RGB
12W

REMOTE
(Sold Separately)



P-RMT-MR16-LED-4W-MC

FULL TOUCH 4-ZONE GROUP CONTROL

- | | |
|-------------------------------|--|
| 2.4 GHz Wireless Transmission | 16 Million Adjustable Color Saturation RGB |
| Adjustable Light Color Mixing | Last Setting Memory |
| Dimming | Control within 100ft |
| Full Color Range Change | 2 AAA Batteries |



DPR38-GL-LED-RGB
12W

RGBW A23 LAMP
12 Watt - 85-265V



DF-LED9402-RGB
4ft - 36 Watt - 120V



DF-LED9408-RGB
8ft - 80 Watt - 120V



For Multi-Color Sign Lights,
(up to 10 for DF-LED9402 or up to 5 for DF-LED9408),
you will need to order: P-RMT-KIT01-RGB

Your Complete Outdoor LED Lighting Source

www.dabmar.com

MAIN WAREHOUSE: 805.604.9090 • fax: 805.604.9050 • 320 Graves Ave. • Oxnard, CA 93030

FLORIDA WAREHOUSE: 941.727.8605 • 5993 28th Street East • Bradenton, FL 34203

Advances in MMW Isolator Design Launch Manufacturers into Stratospheric Operating Frequencies

Improvements in the five critical characteristics of isolators benefit electronics manufacturers in the new path towards next-gen wireless

It doesn't take a crystal ball to know where the future of wireless is heading. With inexhaustible demand driven by 5G, 6G and beyond, ultra-high definition video, autonomous driving cars, security applications and IoT, the sky's the limit for utilizing the higher ends of the electromagnetic (EM) spectrum.

Meeting this demand requires products capable of capitalizing on the millimeter wave (MMW) bands which presently cover the frequencies between 30 GHz to 500 GHz. However, these higher frequencies present a significant problem that design engineers must address: that of standing waves. Without control, these unwanted waves can attenuate power output, distort the digital information on the carrier and, in extreme cases, damage internal components.

To counteract the problem of standing waves at lower microwave frequencies, engineers rely on Faraday rotation isolators – more commonly referred to simply as isolators. At their very basic level, an isolator is a two-port, input and output, component that allows EM signals to pass in one direction but absorbs them in the opposite direction. However, traditional isolators fall short at the higher frequencies required for next-gen wireless applications.

A big part of the problem is that the first isolators were designed more than a half century ago, with very few modifications since the original concept. With recent advancements, however, companies at the cutting edge of MMW technologies are gaining the ability to launch products that operate optimally at stratospheric frequencies.

“The new series of waveguide isolators have been a key enabling technology for VDI, and a large advance from what was previously available,” says Jeffrey Hesler, PhD, CTO of Virginia Diodes, Inc.

VDI is a Virginia-based manufacturer of state-of-the-art test and measurement equipment – such as vector network analyzer, spectrum analyzer and signal generator extension modules – for MMW and THz applications.

“The compact size, extremely low insertion loss, and the wide bandwidth have allowed us to use isolators in a wider variety of our systems than was previously possible, and have led to significant improvements in key system performance metrics such as source power and sensitivity,” says Hesler.

By understanding these advancements in each of the five properties of isolator functionality, designers can better harness isolators to improve their MMW products.



WE HAVE THE ROPE TO GET THE JOB DONE.



Buccaneer Rope
COMPANY

800-358-767

www.bucrope.com

1. *High isolation*

Isolation is a measure of how much of the signal traveling in the reverse direction passes back through the isolator. Because isolators are intended to prevent, or minimize this from happening, the higher the isolation, the better.

“The issue that MMW system designers face is impedance mismatches and the resulting reflections between components,” states David Porterfield, Founder and CEO of Micro Harmonics Corporation (MHC).

Headquartered in Virginia, MHC (www.MicroHarmonics.com) specializes in design solutions for components used in MMW products. Under a two-phased NASA contract awarded in 2015, the company successfully developed an advanced line of isolators for WR-15 through WR-3.4 (50 GHz to 330 GHz) applications.

“In MMW systems, the distance between components is often more than a wavelength, putting reflected signals out of phase,” continues Porterfield. “The out-of-phase reflected signal can perturb the operating point of the upstream component. As you sweep frequencies, the phase changes and you get nulls, dips and degraded performance. However, when you insert an isolator between components, the reflected signal gets absorbed and the problem goes away.”


The highest possible isolation occurs when the reverse wave is rotated exactly 45° into the plane of the isolator’s resistive layer. Isolation can degrade by as much as 10 dB when the signal rotation is off by just 1°.

“The only way to confirm such precision is to fully characterize each isolator on a vector network analyzer,” says Porterfield. “This validates total compliance, as opposed to just spot-checking at a couple of frequencies in the band.”

2. *Low insertion loss*

While isolation is the namesake of these components, the suppression of the reverse wave can’t come at the expense of attenuating the forward, input signal. Insertion loss is a measure of how much loss a signal incurs as it passes through the isolator in the forward direction.

For traditional style isolators, insertion loss is low in the microwave bands, but at MMW frequencies the loss becomes

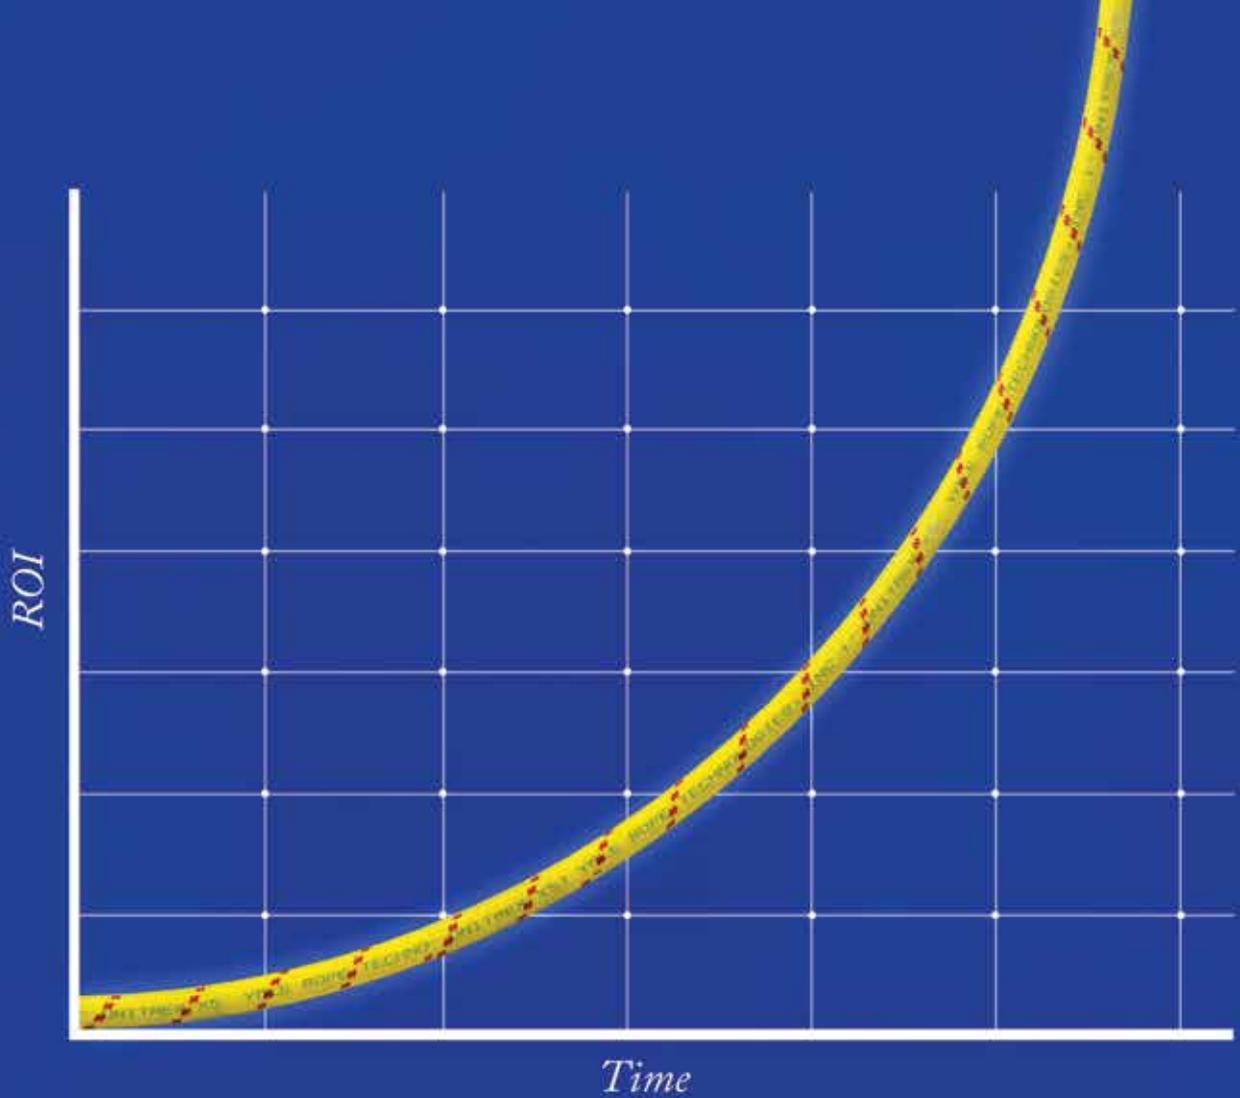

Unitrex XS™ Max Wear. Unmatched performance in the field and in the boardroom.

Electric line stringing is easier and more economical with Unitrex™. Made with a core of Honeywell Spectra®, it is up to 10 times lighter than steel, while delivering comparable strength. The urethane-coated polyester jacket provides excellent abrasion resistance for great productivity that lasts.

To learn more, visit www.yalecordage.com

YALE CORDAGE
Performance. Passion. Possibilities.

77 Industrial Park Road | Saco, Maine 04072 | p (207) 282-3396, f (207) 282-4620



increasingly problematic. For instance, in the WR-10 band (75-110 GHz) the insertion loss can exceed 3 dB, meaning half of the signal power is lost. In the WR-5.1 band (140-220 GHz) the loss climbs to more than 5 dB. Because of high losses, traditional isolators are often precluded for use in MMW systems.

“A designer’s main fear is that the isolator will significantly degrade the strength of the final output,” continues Porterfield. “It can be frustrating for engineers to try and tune the standing waves out of each system, usually with limited success. Many of the alternate methods used are narrow band in nature, so that the solution may work well only over an insufficiently narrow band of frequencies.”

Faraday rotation isolators operate by using ferrite discs to rotate the signal. However, the traditional method to manufacturer them has been to use ferrites that are substantially longer than the minimum required length, and then tune the magnetic bias field to achieve optimal performance. This delivers good isolation, but at a much higher insertion loss.

Porterfield points out a two-fold problem with this work-around. First, there is more of the lossy ferrite in the signal path, and second, the ferrite loss parameter increases at lower magnetization levels.

To minimize loss, it is essential that the ferrite length be reduced as much as possible. The design developed for

NASA saturates the ferrite with a strong magnetic bias field, which allows for the shortest possible length of ferrite to achieve the ideal 45° of rotation. This lowers the insertion loss to less than 1 dB at 75-110 GHz and only 2 dB at 220-330 GHz.

“The extension of isolator technology above 220 GHz is an impressive technical feat, and a key technology that enables us to deliver accurate measurements with higher sensitivity than we were previously able to achieve,” notes VDI’s Hesler.

3. Low port reflection

A good isolator must also have low port reflections. Voltage Standing Wave Ratio (VSWR) is a measure of the reflections at the input and output ports. A good range at MMW frequencies is 1.5:1 or less; 1:1 equals no reflection.

The importance of low port reflections is often overlooked. An isolator with high port reflections creates an alternate set of standing waves. The adjacent components are still adversely impacted by out-of-phase signals reflected back into their ports. High isolation and low insertion loss are of little value if the port reflections are large.

4. High power rating

Power in the reverse traveling signal is absorbed in the isolator, resulting in heat. The more heat it can handle, the higher the power rating. Historically, high heat was not an issue as there was very little power available at MMW



ENGINEERED, TESTED & CERTIFIED

A Tethered Tool System for Applications Involving Work at Height

LEAVE IT TO THE EXPERTS

Snap-on provides a drop prevention system like no other. We'll work with you to determine your drop prevention needs... including the tools, attachment points, lanyards, pouches, and holsters, that combine to create a turnkey solution that enables your workers to do just that...WORK.

SAVE TIME AND MONEY

Engineered attachment points don't interfere with the functionality of the tools, and are more durable than simple "add-ons" that require frequent maintenance or replacement.

BEAT THE STATISTICS

About 70% of drops happen during the exchange of the lanyard from one tool to another. The Snap-on Tools@Height system features independent tethering, which means each tool is attached to its own lanyard. Minimizing exchanges reduces the likelihood of drops and increases safety.

MINIMIZE RISK

Independent tethering also allows the tool to be removed from and returned to its holster or pouch using just one hand. Safety is improved by allowing the user to maintain the critical "three points of contact" when working at height.

RETAIN CONTROL

Our modular approach means you can configure the tools/holsters based on a user's personal preference, while providing a system that meets your safety standards.

See what the most comprehensive tool drop prevention solution in the industry can do for your team's safety and productivity by contacting:

Bob Schnuck | Power Generation & Utility Market Manager
413-519-3380 | robert.a.schnuck@snapon.com



frequencies. However, as higher power sources become available, the importance of power ratings increases.

To handle the problem of high heat loads, some newer isolators are already incorporating diamond heat sinks into their design. Diamond is the ultimate thermal conductor, approaching 2200 W/m·K (watts per meter-Kelvin), more than five times higher than copper. Diamond effectively channels heat from the resistive layer in the isolator to the metal waveguide block, and thus lowers operating temperatures for improved reliability.

5. Small footprint

Minimizing the size and weight of MMW components is especially important in today's wireless applications.

"A standard traditional-style isolator in the WR10 band is about 3 inches long, with a cylindrical section in the center that's about 1.3 inches in diameter," observes Porterfield. "But the newest design shapes are rectangular and can be as small as 0.75 inches per side and 0.45 inches thick."

The same technology used to reduce insertion loss – utilizing the shortest possible length of ferrite – also partially accounts for the reduction in footprint.

In addition to the five critical characteristics, other properties of modern isolators improve their utility at MMW frequencies; for instance, wide bandwidth. Standard waveguide bands typically extend to 40% on either side of the center frequency. Newer, high-performing isolators operate over extended bandwidths exceeding 50% from center frequency, giving designers greater freedom to build more bandwidth into their systems.

Additional advances include isolators that operate in cryogenic conditions, which is critical because a traditional isolator designed for room-temperature operation will perform poorly when cooled.

For more information contact Micro Harmonics: 540.473.9983, sales@mhc1.com, or visit www.MicroHarmonics.com

Transition Fittings

IP13a-13h

PVC SCH 40 & 80 to Rigid Conduit
When Exiting the Concrete Slab

IP15
1 Piece Reaming Bit

IP11 Trapeze Brackets

SPPRODUCTS, INC.

Productivity and value thru ideas

FOR SAFER BETTER FASTER JOBS

We're Proud to be the Electricians' Friend for Over 50 Years!

Conduit & Box Support Plates

Support From Only ONE Rod
Plus Eliminates Conduit Clamps

IP6
4-Way

IP7
8-Way

End Bell Adapter

IP3a

Smooth edges allow faster trouble free wire pulls.
PVC Schedule 40 & 80
Sizes 1/2" thru 6"

QwikDuct

HDPE CUSTOM TEMPLATES

IP1

IP3a PVC Offset

Eliminates chipping out concrete for easier & faster installation
1/2" thru 6" Conduit
1/2" thru 2" Offset

IP19 4-Conduit Support Block

Support up thru 4 conduits From ONLY 1 ROD!

IP15 PATENT PENDING

No Workers Below Prevents Injuries or Deaths

4,000 PSI Tensile Strength at Break

Over 12X Faster than Spacers & Chairs

IP3a Flat "Big O" Box Support Bracket

Slide left or right over face of studs install with only 1 screw at each end plus enables boxes to be slid left or right to any location between studs.

Plus More Products Constantly Being Invented . . . Please Call With Your Ideas!

SPPProducts.com 800-233-8595 info@SPPProducts.com

Buyers

THE WORK TRUCK SHOW

**GreenTruck
SUMMIT**

FLEET | TECHNICAL
CONGRESS

explore **educate** **engage**

March 5-8, 2019

**Indiana Convention Center
Indianapolis, IN**

Sessions begin March 5
Exhibit hall open March 6-8

800-441-6832

worktruckshow.com

Brought to you by **NTEA**
THE ASSOCIATION FOR THE WORK TRUCK INDUSTRY

Ad Index

Company	Pg.	Website
Brandon Industries	3	www.brandonindustries.com
Brex Lighting	1	www.brexlighting.com
Buccaneer Rope	10	www.bucrope.com
Dabmar	7	www.dabmar.com
Emars	16	www.emarsinc.com
Greaves	BC	www.greaves-usa.com
Herculock	IBC	www.herculock.com
Krenz Vent	2	www.krenzvent.com
NTEA	15	www.worktruckshow.com
Randl Inc	IFC	www.randl-inc.com
SP Products	14	www.spproducts.com
Snap On	13	www.snapon.com
Yale Cordage	11	www.yalecordage.com



On Site Employee Verification

Bob Put In 9 Hours And 3 Minutes Of Work On Tuesday.
Stop Guessing. Start Verifying!

Always Know Who, When and Where with eMars Compliant Client and RFID
Be Davis - Bacon Compliant in Minutes • Users Report 85% Savings of Money and Time • Alerts You of 30 Compliance Errors

Ph. 480-595-0466



eMarsinc.com



Solid Brass Padlocks



Hercules Industries, Inc. brings to you the most complete line of solid brass tumbler pin padlocks.

Our locks serve the needs of utilities, state and local governments, business, and agriculture. Precision crafted out of solid brass, our locks withstand inclement weather conditions, and are available with brass, stainless steel, and heat treated (HT) stainless steel shackles. Locks are available keyed alike or different, masterkeyed, and grand masterkeyed. We also can key our locks to most popular keyways (ie. Master, Corbin, Yale, Best, and others).

We are committed to competitive prices, fast delivery, and top quality.



HERCULES INDUSTRIES, INC.
Manufacturer of HERCULOCK Padlocks
P.O. Box 197 • Prospect, Ohio 43342
Toll Free: 1-800-345-2590
Fax: (740) 494-2274
www.HERCULOCK.com

Making perfect connections has never been simpler. In fact, now it's a **SNAP!**

NEW SNAP Connectors from Greaves. A revolutionary compression connector concept that gets the job done with just a few turns of a standard wrench!

- ▶ Time-saving, easy installation
- ▶ Superior pull-out strength and conductivity
- ▶ No bulky and costly tools and dies



GREAVES